

Distributed by:



www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

IDC Socket 2.54mm


2023-254-XX-X

1 2

PITCH : 2.54mm

1 NO. OF PINS : 6 8 10 14 16 20 24 26 30 34 40 44
50 56 60 62 64

2 STRAIN RELIEF : 0-without SR 1-with SR

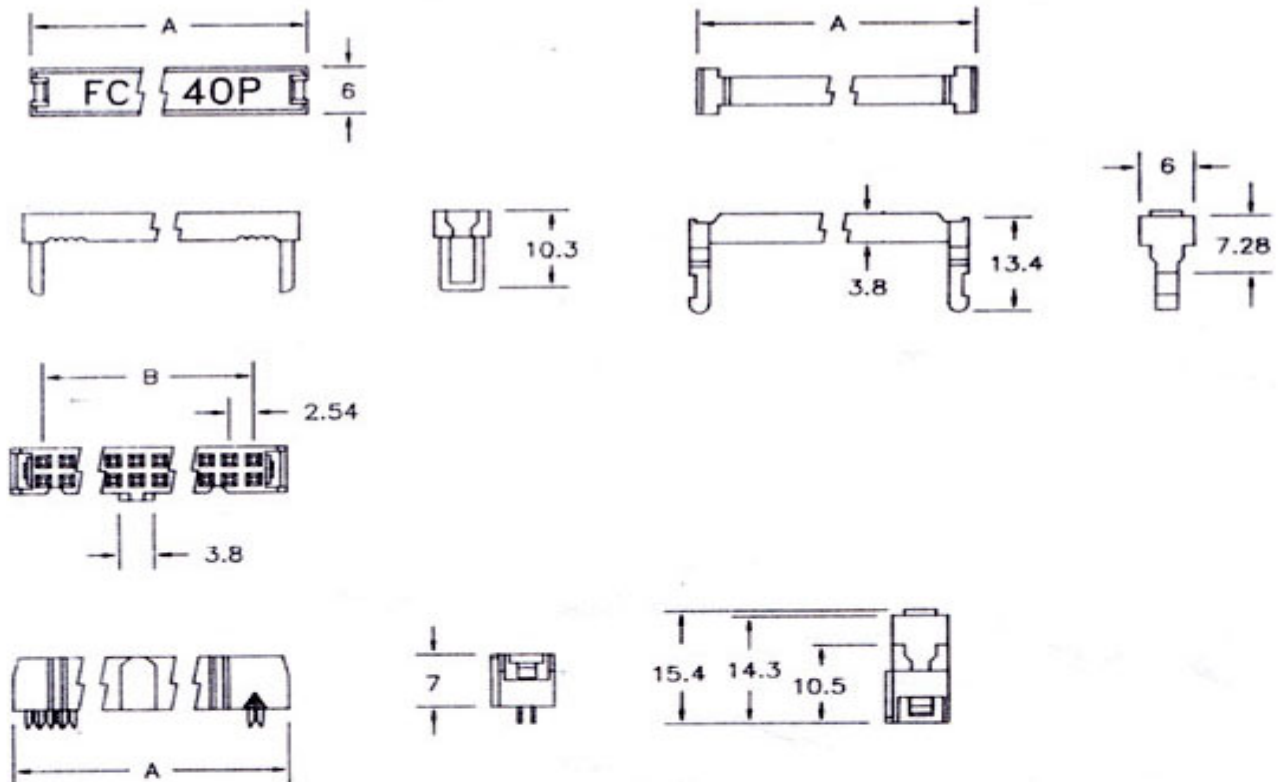

I.D.C SOCKET 2.54mm (0.100")

Specifications:

Contact Resistance: 30mΩmax. at DC 100mA
Insulator Resistance: 1000MΩmin. at DC 500V
Current Rating: 1 AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
Operating Temperature: -55°C~+105°C
Contact: Phosphor Bronze
Housing: PBT & 30% Glass Fiber (UL 94V-O)

Dimension

Position	Dimension	
	A	B
10	17.27	10.16
14	22.35	15.24
16	24.89	17.78
20	29.97	22.86
24	35.05	27.94
26	37.59	30.48
30	42.67	25.56
34	47.75	40.64
40	55.37	48.26
50	68.07	60.96
60	80.77	73.66
64	85.85	78.74